


Technical Specifications

Solarstone Standing Seam Steel Roof and Cladding Modules

Simple, aesthetic, lightweight and cost-effective.

Depending on seam properties the module output varies from 140W to 180W. Modules are compatible with Ruukki, Toode AS and many other profiles.

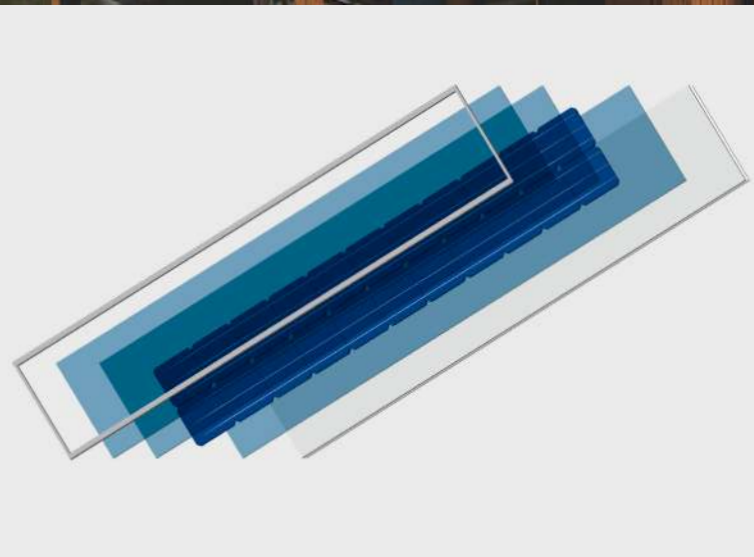


Application

- New-builds & renovation projects
- Residential and public buildings
- Standing seam cladding
- Canopies and ancilliary structures
- Historic buildings where on-roof solutions are not permitted

Advantages

- Easy-to-mount
- Aesthetically attractive
- Weather-proof and highly durable
- No expensive fittings required
- High static load rating
- 10-year warranty for defects
- 25-year warranty for output
- Best solution for public and industrial buildings



Broad seam compatibility





Roof and cladding



Aesthetics

Drawings

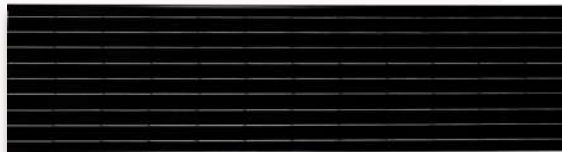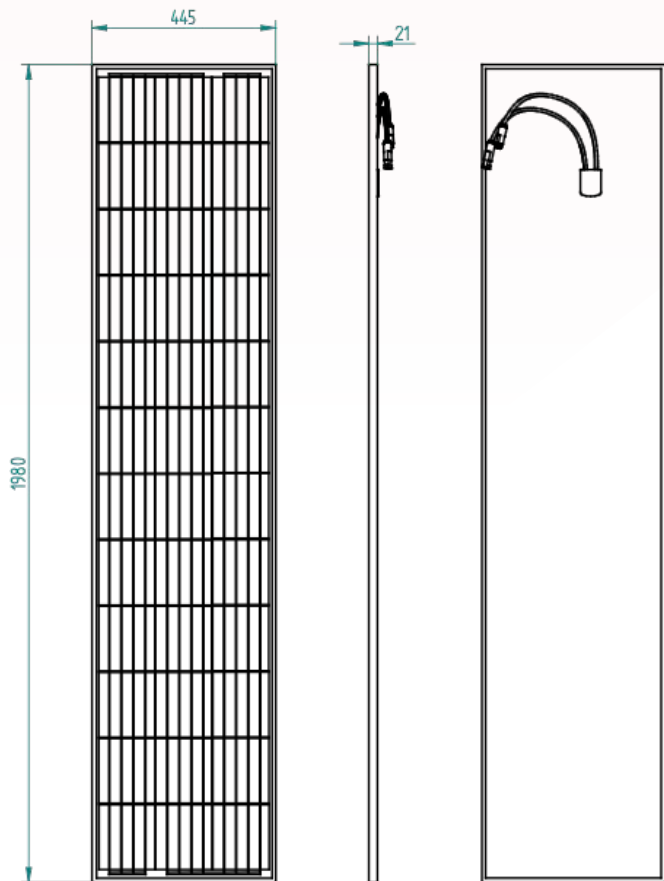

Mechanical Specifications

| | |
|---------------------|-------------------------------|
| Manufacturer | Solarstone |
| Model name | S150B2 |
| Cell type | Monocrystalline, 156 x 156 mm |
| Number of cells | 36 |
| Weight (kg) | 15 |
| Junction box | 1 diode. IP65 |
| Dimensions (mm) | 445 x 1980 x 21 |
| Compatible profiles | Ruukki Classic |

Electrical Specifications

| | |
|---------------------------------|----------|
| Maximum power rating (Pmax) | 150 |
| Tolerance of max power rating | +3/-3% |
| Power temperature coef. (°C) | -0.414 % |
| Open circuit voltage (Voc) | 22,99 |
| Short circuit current (Isc) | 14,7 |
| Maximum power voltage (Vmp) | 19,4 |
| Maximum power current (Imp) | 9,04 |
| Maximum system voltage. DC | 1000 |
| Fuse rating (A) | 15 |
| Static load test passed (kg/m²) | 550 |
| Module efficiency | 18% |
| Output terminal | MC4 |
| Fire rating | Class C |

Materials & Tests

100% Recyclable



- Coated black aluminum frame
- Monocrystalline silicone cells
- Prismatic 3,2mm glass
- Flash testing to ensure rated level of output
- Lead-free solder protects health and the environment
- IEC 61215 & 61730 renewal
- Utility-patented solution (EPO)

